

# LTB-12 rackmount platform

READY FOR INDUSTRY 4.0

- The LTB-12 is a powerful, scalable, 12-slot rackmount platform designed for advanced lab and manufacturing applications.



PART OF THE  
EXFO|FTB ecosystem

## KEY FEATURES AND BENEFITS

**Dedicated to optical modules:** Specifically designed to meet optical applications' most demanding requirements

**Flexible and scalable:** Compact 4U solution with high-level module density for in-rack or tabletop applications

**Hot swappable:** Intelligent module with hot-swap capability, enabling a quick transition from platform to platform, or from rackmount platform to portable platform without powering down

**Connectivity:** USB 3.0, LAN and AMT port for maximum connectivity options

**Increased performance and data reliability:** RAID 1 mirroring for redundancy and data protection

**Industrial-grade computer design:** Simple, easy-to-use design powered by a quad-core processor with the Microsoft operating system

**Out-of-band management:** Optimal remote access for maintenance or initial setup using the Intel® Active Management Technology (Intel® AMT)

**Automation:** Power and flexibility to run automation software and protocol scripts without an external personal computer

**Multi-user sharing:** Efficient utilization of test resources and minimization of capital expenditures (CAPEX)

## RELATED PRODUCTS



Optical power meter  
FTBx-1750




Optical light source  
FTBx-2150/2250



Variable attenuator  
FTBx-3500




Optical switches  
FTBx-9110/FTBx-9160



Optical spectrum analyzers  
FTBx-5245/5255/  
5243-HWA

## EXFO'S LTB-12 PLATFORM

The LTB-12 first-in-class platform is a versatile solution addressing numerous optical measurement applications. Whether in the design lab or during the manufacturing process, the LTB-12 provides users with added versatility and power for today's complex optical systems.

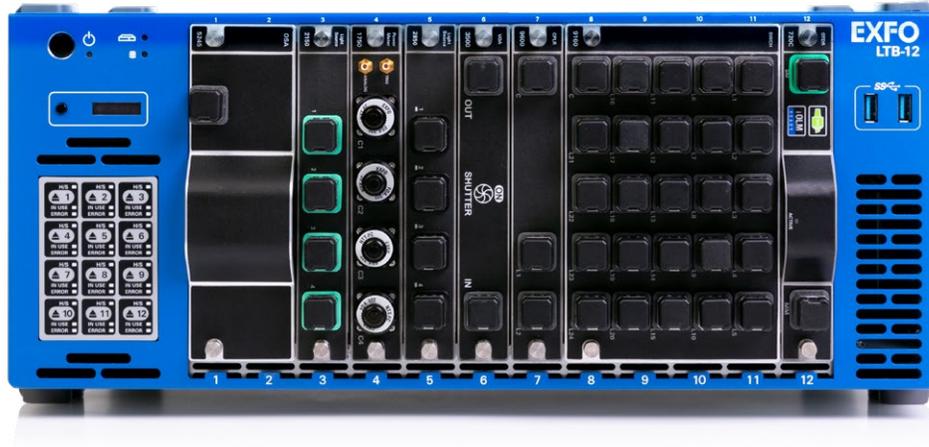

## DO MORE!

Its operating system (Windows 10 IoT Enterprise LTSC 2019) allows for a wide choice of third-party applications and supports an extensive range of USB devices.

- Start faster and multitask
- Use the Office suite
- Connect to printers, cameras, keyboards, mice, and more

## Bring your own apps



Share your desktop  
(e.g., using  
TeamViewer)



Antivirus  
software



Communicate  
via email and  
over-the-top  
(OTT) apps



Record and  
automate  
actions



Share files via  
cloud-based  
storage

## OPTICAL TEST MODULES

### HIGH-PERFORMANCE POWER METER



**FTBx-1750**

- Fast, accurate and flexible power measurements in a platform-based solution
- Remote measurement head for high-power readings

### VARIABLE ATTENUATOR



**FTBx-3500<sup>a</sup>**

- Ideal for transceiver testing and system verification in demanding 24/7 production environments
- Power monitoring and BER testing

### OPTICAL SWITCHES



**FTBx-9110/FTBx-9160**

- Provide highly accurate and repeatable fiber-to-fiber switching
- MEMs-based design or opto-mechanical models available
- From 1x2 up to 1x32 configurations



**LTBe-9110**

- Repeatable fiber-to-fiber switching in a compact format
- Singlemode 1x4 and 1x8
- ½U rackmount casing

### OPTICAL SPECTRUM ANALYZERS



**FTBx-5245/FTBx-5255**

Delivers a full range of spectral analysis capabilities for testing lasers, transmitter optical subassemblies (TOSAs), transmitters or full optical systems



**FTBx-5243-HWA**

High wavelength accuracy optical spectrum analyzer for DWDM, CWDM and DWDM over CWDM networks

### UTILITY MODULE



**FTBx-9600**

- The utility module can integrate couplers and splitters into the LTB-12 platform
- 1x2 up to 1x8 couplers with various ratios

### LIGHT SOURCES



**FTBx-2150**

Single or multiwavelength, multimode LED diodes and singlemode DFB lasers for insertion loss and optical return loss testing



**FTBx-2250**

Broadband light source, covering all bands required for telecommunication applications and PON testing



**FTBx-2850**

µITLA continuous wave (CW) tunable laser with a high-power output, narrow linewidth and high-resolution tunability for coherent/OFDM transmission and WDM network emulation

### OTDR MODULES



**FTBx-720C/D**

Ideally designed OTDR for everyday field testing in any access network. With an iOLM application for both singlemode and multimode testing, it's the most automated and intelligent troubleshooting tool for FTFA, LAN and data centers



**FTBx-730C/D**

Seamlessly characterize splitters in PON FTTx and MDU applications



**FTBx-735C/D**

High-resolution OTDR designed for metro network testing and splitter characterization in PON FTTx applications



**FTBx-740C**

C-band DWDM and 18-wavelength CWDM tunable OTDR series for metro Ethernet, remote PHY and passive C-RAN link characterization.



**FTBx-750C**

High dynamic range combined with high resolution for highly accurate fiber characterization

a. Some limitations apply when using more than 9 FTBx-3500 modules on a single LTB-12.

## FIBER CONNECTOR INSPECTION AND CERTIFICATION—THE ESSENTIAL FIRST STEP



Taking the time to properly inspect a fiber-optic cable can prevent a slew of problems down the line—saving you time, money and headaches.

### FIP-430B | The first fully automated fiber inspection scope for the field

Housing a unique automatic focus adjustment system, the FIP-430B automates each operation in the connector endface inspection sequence, transforming this critical process into one quick and easy step that can be performed by technicians of all skill levels.

### Three models to fit your budget

FEATURES	Basic FIP-410B	Semi-automated FIP-420B	Fully automated FIP-430B
Three magnification levels	•	•	•
Image capture	•	•	•
Five-megapixel CMOS capturing device	•	•	•
Automatic fiber image-centering function		•	•
Automatic focus adjustment			•
Onboard pass/fail analysis		•	•
Pass/fail LED indicator		•	•

Read the [FIP-400B specification sheet](#) or visit [EXFO.com/keepthefocus](http://EXFO.com/keepthefocus) for more information.

100% automated<sup>a</sup>

1-step process<sup>a</sup>


57% shorter test time<sup>b</sup>

## SOFTWARE TEST TOOLS

These platform-based software testing tools enhance the value of the LTB-12 platform, providing additional monitoring and inspection testing capabilities.

### Software applications—ConnectorMax

Providing lightning-fast results in the first step of fiber-link testing, ConnectorMax is a powerful platform-based, automated inspection application; it delivers quick pass/fail assessment of connector end faces and is specifically designed to save both time and money in the field and in the lab.

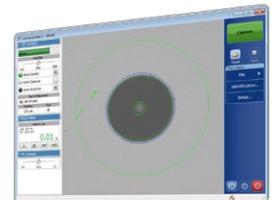

ConnectorMax

## Intel® Active Management Technology (Intel® AMT)



Remotely manage the platform (out-of-band management) without being dependent on the operating system or the state of the unit. The AMT Web-based application simplifies the out-of-the-box experience and, as an open-source solution, allows programmable remote troubleshooting recovery with extended capabilities and increased effectiveness.

a. Model FIP-430B only.

b. Data sourced from EXFO's case study, with calculation based on typical analysis time.

## ADAPTED FOR DEDICATED APPLICATIONS. DEDICATED TO HELPING YOU ADAPT.

Thanks to its small format, ultra-powerful processing and highly intuitive interface, the LTB-12 is optimized to enable lab users to carry out dedicated optical and photonic integrated circuit (PIC) test applications simply and efficiently.

- |                              |  |                       |                             |
|------------------------------|--|-----------------------|-----------------------------|
| 1 Power button               | 6 Display activation button            | 11 Ethernet ports (2) | 16 Audio port               |
| 2 Power LED                  | 7 Module slots (12 available in total) | 12 USB 3.0 ports (4)  | 17 Grounding lug            |
| 3 Status LED                 | 8 USB 3.0 ports (2)                    | 13 Video port (VGA)   | 18 Hard disk drive bays (2) |
| 4 Hard disk LED              | 9 Module status LEDs                   | 14 Video port (HDMI)  | 19 Power supply             |
| 5 System information display | 10 Module eject button                 | 15 Microphone port    |                             |



## SPECIFICATIONS<sup>a</sup>

Mainframe	Quad-core Intel processor / 8 GB RAM / Windows 10 IoT Enterprise LTSC 2019	
Interfaces	• RJ45 LAN 10/100/1000 Mbit/s ports (2) • USB 3.0 ports (6)	• HDMI and VGA video ports • Headset and microphone ports
Storage	128 GB SSD	
Power supply	AC input: 100 V – 240 V <sub>~</sub> ; 50/60 Hz; 10 – 4.2 A	

## GENERAL SPECIFICATIONS

Size (H x W x D) <sup>b</sup>	199 mm × 459 mm × 436 mm (7 <sup>13/16</sup> in x 18 <sup>1/16</sup> in x 17 <sup>3/16</sup> in)	
Weight	16 kg (36 lb)	
Temperature	Operating	0 °C to 40 °C (32 °F to 104 °F)
	Storage	-40 °C to 70 °C (-40 °F to 158 °F)
Relative humidity	0 % to 80 % non-condensing	

## ACCESSORIES


GP-130	GPIB cable (6 feet/2 meters)	GP-2259	Benchtop feet pads
GP-2016	RJ45 LAN cable (10 feet)	GP-2296	19-inch rackmount brackets (kit of 2)
GP-2256	FTBx module slot blank cover	GP-3109	23-inch rackmount shelf
GP-2258	USB to GPIB adapter		

## LASER SAFETY



- a. All specifications valid at room temperature.  
 b. Size only includes feet and not rackmount bracket. Rackmount configuration will fit inside 4U, 19-inch bay.

## ORDERING INFORMATION

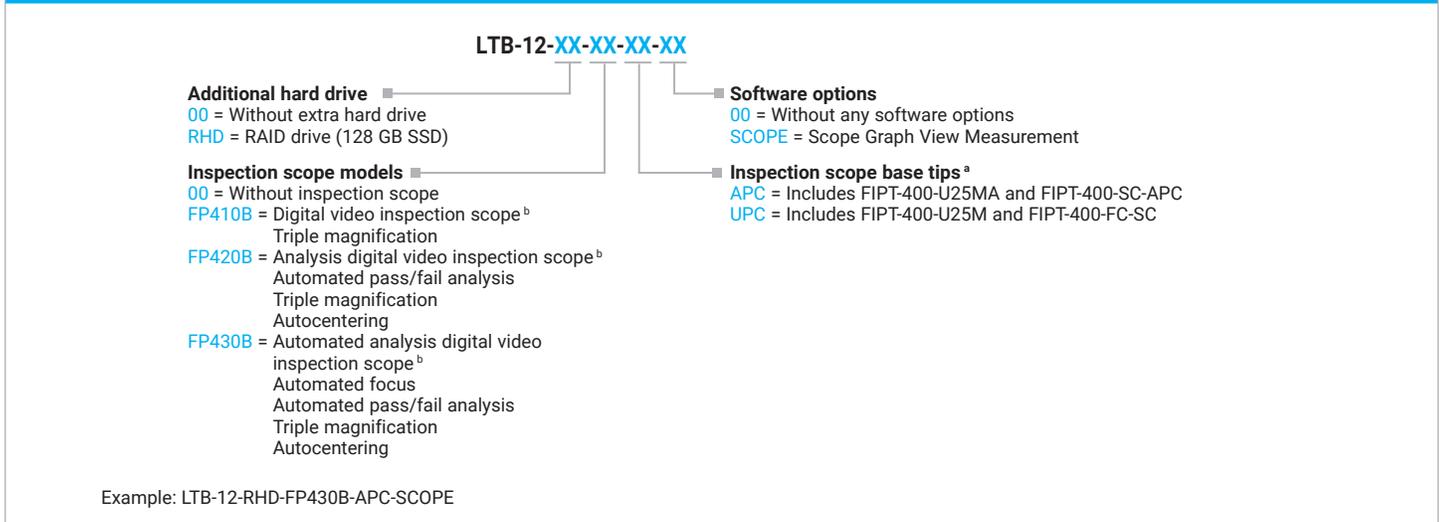

- a. Available if inspection scope is selected. For more information concerning all available optional tips, please visit [www.EXFO.com/FIPTips](http://www.EXFO.com/FIPTips).  
 b. Includes ConnectorMax software.

**EXFO headquarters** T +1 418 683-0211 **Toll-free** +1 800 663-3936 (USA and Canada)

EXFO serves over 2000 customers in more than 100 countries. To find your local office contact details, please go to [www.EXFO.com/contact](http://www.EXFO.com/contact).

For the most recent patent marking information, please visit [www.EXFO.com/patent](http://www.EXFO.com/patent). EXFO is certified ISO 9001 and attests to the quality of these products. EXFO has made every effort to ensure that the information contained in this specification sheet is accurate. However, we accept no responsibility for any errors or omissions, and we reserve the right to modify design, characteristics and products at any time without obligation. Units of measurement in this document conform to SI standards and practices. In addition, all of EXFO's manufactured products are compliant with the European Union's WEEE directive. For more information, please visit [www.EXFO.com/recycle](http://www.EXFO.com/recycle). **Contact EXFO for prices and availability or to obtain the phone number of your local EXFO distributor.**

For the most recent version of this spec sheet, please go to [www.EXFO.com/specs](http://www.EXFO.com/specs).  
 In case of discrepancy, the web version takes precedence over any printed literature.